

**EC type-examination certificate
UK/0126/0117**

Issued by:

**The National Measurement Office
Notified Body Number 0126**

In accordance with the requirements of the Measuring Instruments (Taximeters) Regulations 2006 (SI 2006/2304) and the Measuring Instruments (Non-Prescribed Instruments) Regulations 2006 which implement, in the United Kingdom, Council Directive 2004/22/EC, this EC type-examination certificate has been issued to:

**Cygnus Automotive Ltd
Unit 10
Advance Business Park
Burdock Close
Cannock
Staffordshire
WS11 7FG
United Kingdom**

in respect of a taximeter designated the MR500 View and having the following characteristics:

Taximeter constant : k = 650 to 360,000
Maximum speed : 255 mph

The necessary data (principal characteristics, alterations, securing, functioning etc) for identification purposes and conditions (when applicable) are set out in the descriptive annex to this certificate.

**Issue Date: 21 December 2011
Valid Until: 20 December 2021
Reference No: TS16/0001**


**Signatory: P R Dixon
for Chief Executive**

Descriptive Annex

1 INTRODUCTION

The pattern is a taximeter designated the MR500 View, designed to be installed in a road vehicle for the calculation of fares. The fares are calculated based on measurement of distance and time, the instrument operates in single mode calculation (time or distance counting). The instrument is powered via the vehicle battery.

The distance measuring device (transducer) is not covered by this certificate.

2 FUNCTIONAL DESCRIPTION

2.1 Construction

The instrument (Figure 1) is connected to a pulse generator fixed to a moving part of the vehicle.

- All electronics are enclosed in a Polycarbonate ESA case, comprising front and rear cases.
- The PCBs are fixed onto a Polycarbonate inner case.
- The front face consists of an Acrylic mirror.
- The user control and display interface comprises an LED display behind the mirror and five function keys located at the bottom of the front panel (Figure 2).
- The taximeter has a number of electrical connections, located at the top of the rear panel for Power, Lamp Output, Relay Output, Communications and Test I/O.
- A screw located on the rear face can be sealed to prevent access to the case, a sealable cover prevents access to the Test Connector.
- A slot located at the bottom of the instrument allows the insertion of a tariff or software card.

2.2 Devices

The instrument has the following devices:

- Time or distance counting
- Fare calculation (initial fare, fare increments, extras)
- Display of rate, mode (For Hire, Hired, Stopped) and fare (actual fare and total fare with extras)
- Optional printing
- Loading of tariffs and software
- Real time clock
- Totals (various parameters are recorded and can be recalled on demand)
- Recorded journey information

3 TECHNICAL DATA

3.1 The MR500 View has the following technical characteristics.

Power supply	12 V DC
Taximeter constant k	650 to 360,000 pulses/mile
Maximum speed	255 mph
Pulse voltage amplitude (low-high)	2-4 V to 0- 20 V
Pulse frequency	0 to 25 kHz
Electromagnetic environment	E3
Mechanical environment	M3
Climatic environment	-40°C to +70 °C
	Non-condensing (closed)

3.2 Documentation and drawings

Description	Drawing / Document number	Revision/Issue
User Manual	C2884	2
Dealer Manual	C2885	1
Schematic diagram	C2242 (7 sheets)	6
Block diagram	C2492	2
Technical file	C2909	1

3.3 Software

3.3.1 The software is designated version 2.09.00, which can be displayed via the software menu.

3.3.2 Securities

The legally relevant software is protected by a 32-bit checksum. When power is applied to the taximeter, a separate boot loader application performs a checksum calculation on the legally relevant software. If the checksum fails, the legally relevant software is not executed.

The legally relevant software may be changed only by means of an encrypted software card. The card is inserted into a slot on the lower side of the taximeter and carries various data, including program data blocks and checksums, in a format that is unique to the MR500 View taximeter. The boot loader application will reject any card that does not meet the physical, electrical, data format and encryption requirements.

Parameters affecting the measurement data can only be changed by means of an encrypted software/tariff card.

4 PERIPHERAL DEVICES AND INTERFACES

4.1 Interfaces

The instrument has the following interfaces:

- Comms/CAN connector (8-pin)
- Power/Top Sign/Speed Pulse connector (6-pin)
- Relays connector (4-pin)

- Sealed Test connector (not available to the user)
- Software/tariff slot

4.2 Peripheral devices

The instrument may be connected to any peripheral device that has been issued with a test certificate or parts certificate by a Notified Body responsible for Annex B (MI-007) under Directive 2004/22/EC in any Member State and bears the CE marking of conformity to the relevant directives; or

A peripheral device without a test certificate may be connected under the following conditions:

- it bears the CE marking for conformity to the EMC Directive;
- it is not capable of transmitting any data or instruction into the measuring instrument, other than to release a printout, checking for correct data transmission or validation;
- it prints measuring results and other data as received from the measuring instrument without any modification or further processing; and
- it complies with the applicable requirements of Paragraph 8.1 of Annex I.

5 APPROVAL CONDITIONS

The certificate is issued subject to the following conditions:

5.1 Legends and inscriptions

The instrument bears the following legends (Figure 3):

‘CE’ marking
 Supplementary metrology marking
 Notified body identification number
 Serial number
 Manufacturers mark or name
 Certificate number
 Temperature range

6 LOCATION OF SEALS AND VERIFICATION MARKS

6.1 The ‘CE’ marking, supplementary metrology marking and certificate number are located on the rear face. The CE mark shall be impossible to remove without damaging it. The data plate shall be impossible to remove without it being destroyed.

The markings and inscriptions shall fulfil the requirements of Paragraph 9 of Annex I of the Directive 2004/22/EC.

6.2 Components that may not be dismantled or adjusted by the user (case, test connector, transducer connection) will be secured by either a wire and seal or tamper evident label and securing mark.

The securing mark may be either:

- a mark of the manufacturer and/or manufacturer's representative, or
- an official mark of a verification officer.

6.3 The tariff card slot may be secured as in 6.2, or may be left unsecured if allowed in National Regulations to allow tariff updates.

7 ALTERNATIVES

There are currently no authorised alternatives.

8 ILLUSTRATIONS

Figure 1 MR500 View
Figure 2 Display
Figure 3 Rating plate

9 CERTIFICATE HISTORY


ISSUE NO.	DATE	DESCRIPTION
UK/0126/0117	21 December 2011	Type examination certificate first issued.



Figure 1 MR500 View



Figure 2 Display and function keys

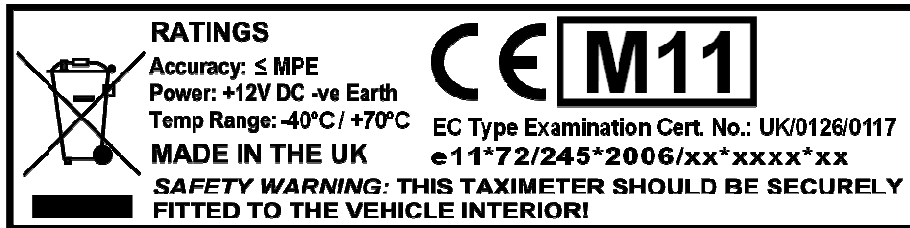

Unit 10, Advance Business Park, Burdock Close, Cannock, Staffordshire, WS11 7FG. UK.

Figure 3 Rating plate